


Dependable.

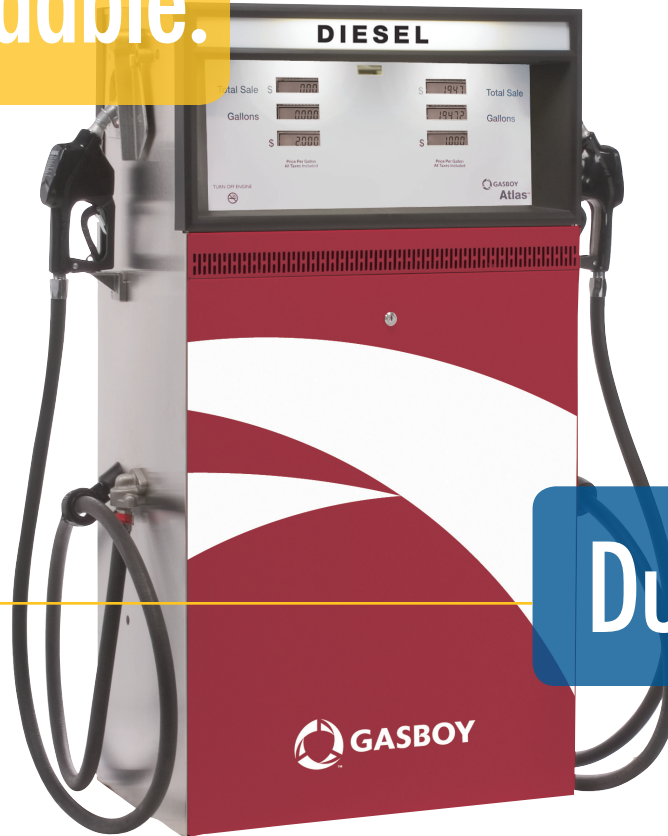

Durable.

## Gasboy® Atlas® Pumps & Dispensers for Retailers

Sometimes the best solutions are the most simple ones. Gasboy Atlas pumps and dispensers provide retailers with all the basics for retail fueling.

with your point of sale system for use at your primary fueling island. Or, use Atlas pumps and dispensers to offer secondary products like kerosene.

Durable, reliable, and proven pumps and dispensers are available in electronic and mechanical models to meet your needs. They can interface



## Electronic pumps & dispensers - 22GPM\*

Model Number	Type	Hoses	Products	Motors	Meters
8853K	Pump	Single	1	(1) 1 hp	Gilbarco CFT
8852KTW1	Pump	Twin	1	(1) 1 hp	Gilbarco CFT
8853KTW1M	Pump	Twin	1	(2) 1 hp	Gilbarco CFT
8853KTW2	Pump	Twin	2	(2) 1 hp	Gilbarco CFT
8853KX	Dispenser	Single	1	n/a	Gilbarco CFT
8853KXTW1	Dispenser	Twin	1	n/a	Gilbarco CFT
8853KXTW2	Dispenser	Twin	2	n/a	Gilbarco CFT



## Mechanical pumps & dispensers - 22GPM\*

Model Number	Type	Hoses	Products	Motors	Meters
8753K	Pump	Single	1	(1) 1 hp c.d.	Gilbarco CFT
8752KTW1	Pump	Twin	1	(1) 1 hp c.d.	Gilbarco CFT
8753KTW1M	Pump	Single	1	(2) 1 hp c.d.	Gilbarco CFT
8753KTW2	Pump	Twin	2	(2) 1 hp c.d.	Gilbarco CFT
8753KX	Dispenser	Single	1	n/a	Gilbarco CFT
8753KXTW1	Dispenser	Twin	1	n/a	Gilbarco CFT
8753KXTW2	Dispenser	Twin	2	n/a	Gilbarco CFT

\*Flow rate at ideal test conditions. Actual flow rate may vary based on conditions at installation.

## Atlas™ Features Option Summary

	8753	8853
Regulatory Approvals: UL and cUL listed, Measurement Canada, NCWM	S	S
Working Pressure: 50 psi maximum	S	S
Unit of Measure: Gallons (Liters optional)	S	S
Motor/Voltage: 1HP continuous duty motor 115V/60HZ	S	S
Voltage: 230V/50HZ and 380V/50HZ/3-Phase	0	0
Pump: 10 vane rotary pump with integrated air separator	S	S
1" solenoid valve for slow-down preset operation (PP)	S	S
Integrated internal spin-on filter (F)	S	S
External spin-on type filter	0	0
Discharge: 1" NPT black iron	S	S
Satellite Piping - dispensers only (S)	0	0
1-1/2" NPT inlet	S	S
Housing: 13 Gallon painted G90 galvanized steel	S	S
Lockable, removable panels - painted 20 gauge G60	S	S
Lockable, removable panels - Stainless steel 22 gauge Kooline	0	0
Painted replaceable sheathing - G60 galvanized (22 gallon)	S	S
Stainless steel sheathing - Kooline (22 gallon)	0	0
Electronic computer: Displays money, volume, and PPU	N	S
Electronic totalizer records 10-digits and displays 6-digits on the LCD display	N	S
Mechanical computer: VR10 - Money, volume, and PPU, includes integrated totalizer and power reset	S	N
Electronic display: Money, volume, and PPU front display. 3/4" backlighted LCD 6-digit money and volume, 4-digit PPU	N	S

	8753	8853
Pulser: (10:1 or 100:1 volume) for key or card systems (CC or CX)	0	N
Pulser: (100:1 money) for key or card systems (CM)	0	N
Gilbarco 2-wire	N	S
Pulse output	N	0
Lighted brand panel (L)	S	S
Electro-mechanical non-settable totalizer (7-digit)	N	0
Nozzle position: Side mount	S	S
Internal hose retractor (I)	S	S
High hose retractor: post-mounted retractor with enclosed spring return reel	0	0
AST Application: Pressure Regulating Valve Model 52A (9048577)	0	0
12 month parts and labor warranty	S	S
24 month parts and labor warranty	0	0
ATC (Canada only)	N	0
Hand crank (K)	0	N
Balanced vapor recovery system (Healy Universal Kit compatible)	0	0
Hose: 3/4" or 1" (specify length) - standard or vapor recovery	0	0
Automatic nozzles, breakaway valves, and swivels	0	0
Programmable pump reset (export only)	N	0
Auto-on (export only)	N	0

S = Standard, 0 = Optional, N = Not available

